



630-Watt CMH Dual Enclosed System

Performance			
Lamp	Number	2	
	Watts	315W	
InputVolts	120V	240V	
Input Current	5.78A	2.86A	
Input Power	686W		
Min Power Factor	0.95		
THD	<15%		
Crest Factor	<1.7		

Physical			
Case Length	270.5mm	10.65"	
Case Width	316.5mm	12.46"	
Height	562mm	22.13"	
Weight	5.6kg	12.35lb	

Protections

- 1.End of Lamp Life(EOL)Protection
- 2.Short circuit protection
- 3.Open circuit protection
- 4.Ignition failure protection
- 5.Thermal protection


Installation & Application Notes

- 1.Max. allowable case temperature:75°C/167°F.
- 2.Ambient Temperature:-20...+40°C/-4...+104°F.
- 3.Ignition voltage is 5kV.
- 4.Remote Mounting:5m/16ft.
- 5.Power must be cycled off-then on,after replacing the lamp.


Performance Requirements:

Rated mains voltage:	120-240V
Voltage range (+/-10%):	108-264V
Mains frequency:	50/60Hz
Operation frequency :	140-220Hz

Main Dimension

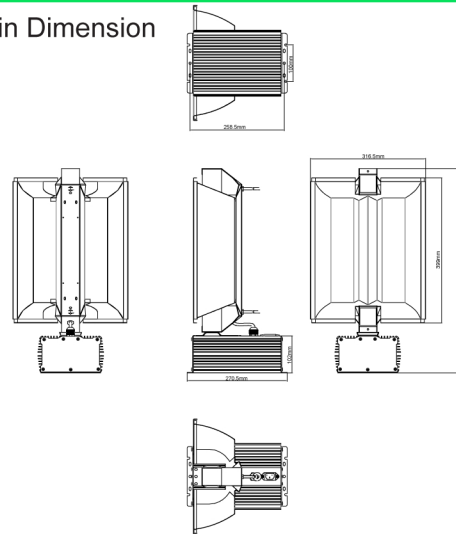

Wiring Diagram



Tcase max=75°C/167°F

